


PLACE ODOT 1/2" DENSE MIX AC, MIN. THICKNESS OF 3" OR THICKNESS OF THE REMOVED PAVEMENT, WHICHEVER IS GREATER. COMPACT AS SPECIFIED

SEAL SURFACE OVER JOINT WITH TACK MATERIAL AND SAND (AC PATCH ONLY)

EXIST. PAVEMENT

TACK COAT CUT EDGES

EXIST. PAVEMENT

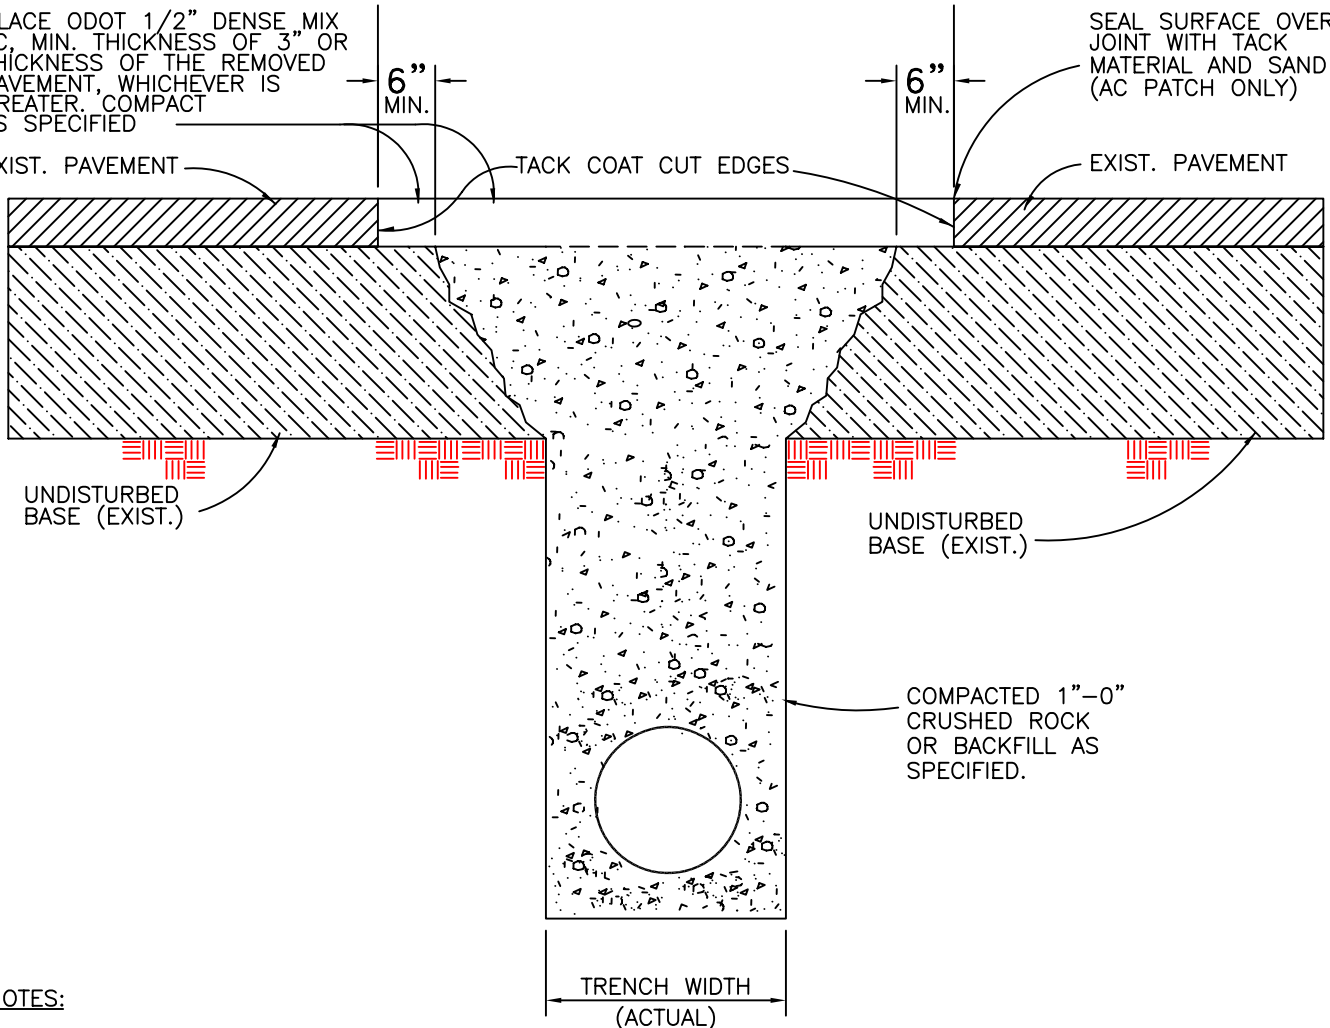

NOTES:

1. PERMITS ARE REQUIRED FOR ANY STREET CUT. CALL 503-668-5533 OR VISIT WWW.CI.SANDY.OR.US FOR AN APPLICATION.

2. ALL EXISTING AC OR PCC PAVEMENT SHALL BE SAWCUT PRIOR TO SURFACE RESTORATION.

3. PCC PAVEMENT SHALL BE REPLACED WITH CONCRETE TO A MINIMUM THICKNESS OF 6" OR TO THE THICKNESS OF THE REMOVED PAVEMENT, WHICHEVER IS GREATER.

4. TRENCH BACKFILL SHALL BE COMPACTED TO 95% OF MAXIMUM RELATIVE DENSITY (AASHTO T-99). THE CITY MAY REQUIRE TESTING TO VERIFY COMPACTION.

5. IF EXISTING BASE MATERIAL IS CTB OR ATB, THEN REPLACEMENT MATERIAL SHALL MATCH EXISTING. CDF MAY BE SUBSTITUTED WITH APPROVAL OF CITY ENGINEER.

6. STREETS WITH RECENT OVERLAYS (≤ 3 YEARS) MAY HAVE MORE EXTENSIVE SURFACE RESTORATION REQUIREMENTS.

CITY OF SANDY

STREET OPENING

DATE:

AUG 2004

DRAWING NO.

213